


PREMIER - UP TO 1200 LPM

Larger Premier housings, starting from the 12 round, offers additional convenience by utilising a swing bolt and davit arm assembly. This feature, safely and effortlessly moves the housing lid to one side during change out, eliminating the need for heavy lifting and significantly reducing downtime. Accommodating flow rates up to 1200 litres per minute, these housings include 3" DN80 inlet and outlet connections on the 12 x 30" version and 4" DN100 on the 12 x 40". Housings come with two drain ports for complete emptying of the housing during change out and pressure gauges to provide accurate differential pressure readings for filter monitoring.

The Glass Bead finish hardens the housing surface, increasing resistance to wear & corrosion.

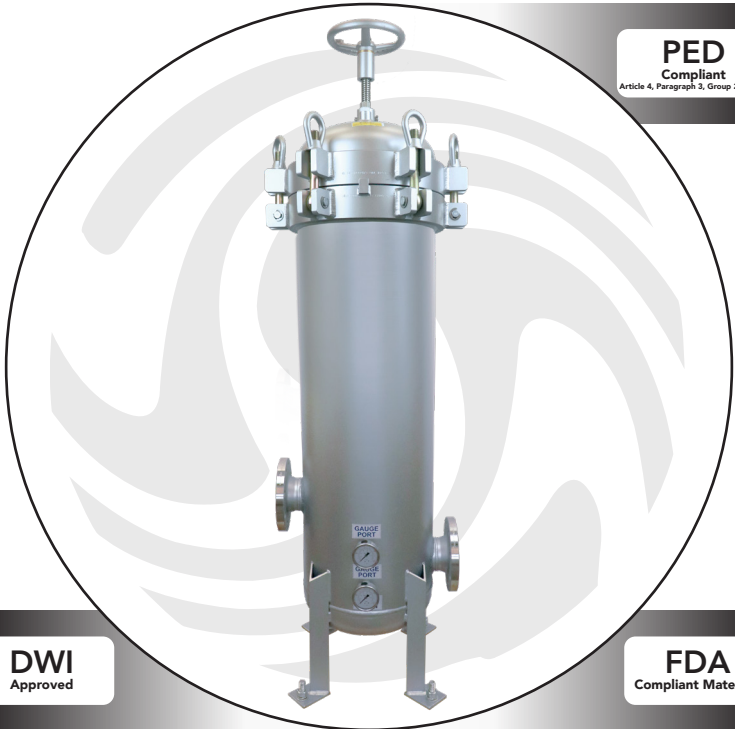

FEATURES & BENEFITS



- Swing bolt closure for secure seal
- Universal cartridge adaptors securely hold 222, DOE or AA cartridges
- Drain ports allow for quick and easy cartridge change outs
- Protective Glass Bead finish

TECHNICAL DATA




Port Sizes (")	3 DN80 Flange
	4 DN100 Flange
Cartridge Compatibility (")	30, 40
End-Cap Compatibility	EH, EG, DOE, AA
Pressure Rating (bar)	10
Temperature Rating (°C)	121

MATERIALS OF CONSTRUCTION




- Head & Body: 316L Stainless Steel
Eye Nut &
Swing Bolt: 304 Stainless Steel
Legs: 304 Stainless Steel
O-ring: Buna-N

DIMENSIONS

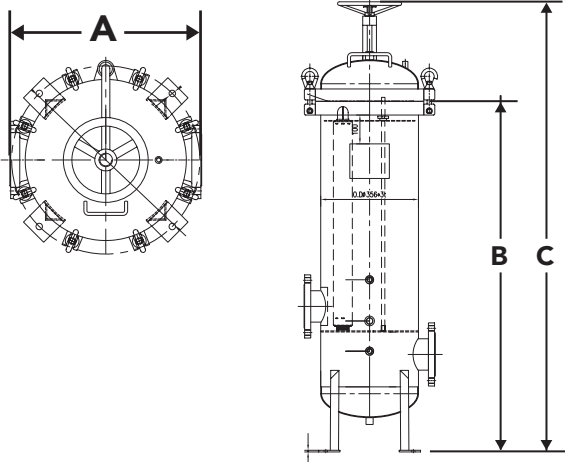

Dimensions (mm)			
Housing	A	B	C
PFH-SGB-12-30	475	1277	1640
PFH-SGB-12-40	475	1537	1890

FLOW RATE

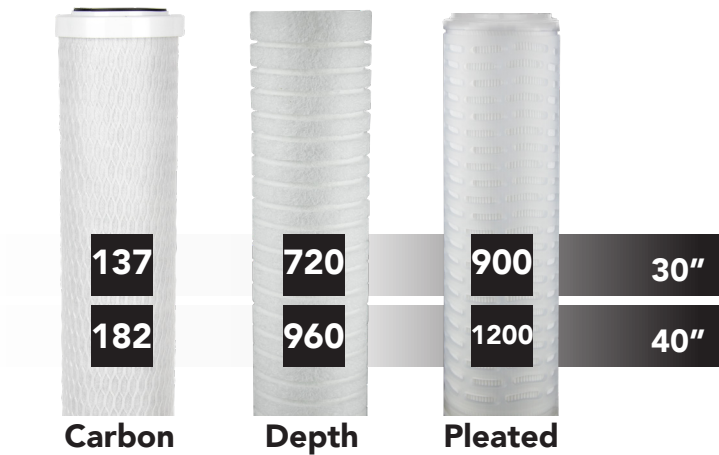

ORDERING GUIDE

Code		Material		No. of Cartridges		Cartridge (")		Port Size (")		Code
PFH		SGB		12		30 40		3 4		G

e.g. PFH-SGB-12-30-3-G

PRODUCT RANGE

The below products have often been associated with this product.



Premier 7
Flow up to 700 lpm



Premier 12
Flow up to 1200 lpm



Premier 21
Flow up to 2100 lpm



Premier 36
Flow up to 3600 lpm