


PREMIER - UP TO 2100 LPM

The 21 round housing utilises a swing bolt and davit arm assembly to safely and effortlessly move the housing lid to one side, eliminating the need for heavy lifting and significantly reducing downtime during change out. Providing effective filtration equivalent to 84 10" cartridges, this housing is supplied with 4" DN100 inlet and outlet connections, drain ports for complete emptying of the housing during change out and pressure gauges to provide accurate differential pressure readings for filter monitoring.

The Glass Bead finish hardens the housing surface, increasing resistance to wear & corrosion.

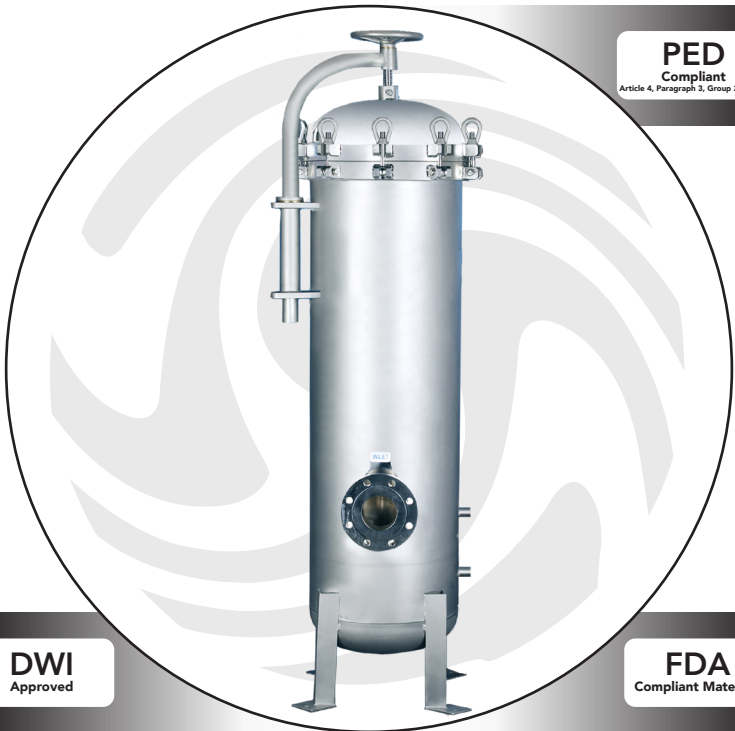

FEATURES & BENEFITS

- Swing bolt closure for secure seal
- Universal cartridge adaptors securely hold 222, DOE or AA cartridges
- Drain ports allow for quick and easy cartridge change outs
- Protective Glass Bead finish


TECHNICAL DATA

Port Sizes (")	4 DN100 Flange
Cartridge Compatibility (")	30, 40
End-Cap Compatibility	EH, EG, DOE, AA
Pressure Rating (bar)	10
Temperature Rating (°C)	121

MATERIALS OF CONSTRUCTION


- Head & Body: 316L Stainless Steel
Eye Nut & Swing Bolt: 304 Stainless Steel
Legs: 304 Stainless Steel
O-ring: Buna-N

DIMENSIONS

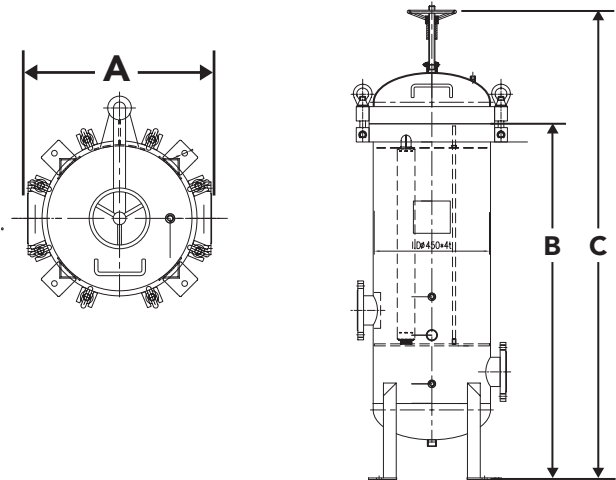

Dimensions (mm)			
Housing	A	B	C
PFH-SGB-21-30	582	1415	1833
PFH-SGB-21-40	582	1669	2087

FLOW RATE

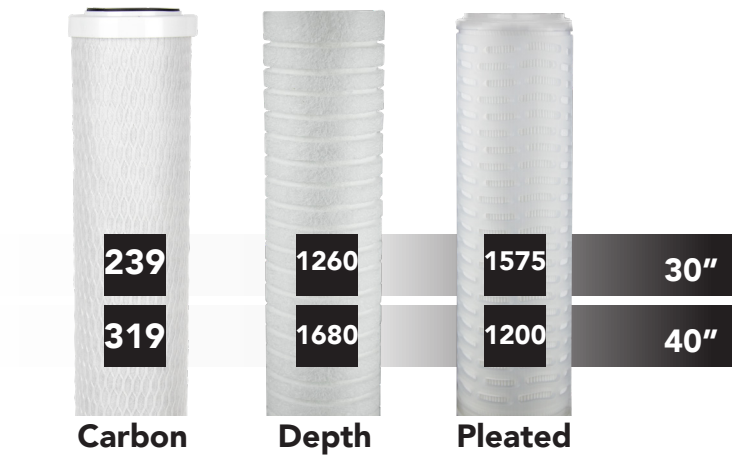

ORDERING GUIDE

Code		Material		No. of Cartridges		Cartridge (")		Port Size (")		Code
PFH		SGB		21		30 40		4		G

e.g. PFH-SPC-21-30-4-G

PRODUCT RANGE

The below products have often been associated with this product.



Premier 7
Flow up to 700 lpm



Premier 12
Flow up to 1200 lpm



Premier 21
Flow up to 2100 lpm



Premier 36
Flow up to 3600 lpm