

GRANULAR CARBON

This inline cartridge targets taste and odour using granular coconut shell carbon media. The polypropylene casing is friction-welded, ensuring a seal entirely free from glues and binding agents. The SCIG comes with simple 1/4" push fit connectors for ease of installation and change-out.



FEATURES & BENEFITS



- Simple, economic configuration
- Simple, inline 1/4" push fit adaptors allow for quick and easy cartridge change-out
- Granular Activated Coconut Carbon (GAC) media for effective chlorine, taste and odour (CTO) control
- 20µm filter pad for basic particulate removal to improve water quality
- Kiwa UK Reg 4 Certified

TECHNICAL DATA




Micron Rating (µm)	20
Length (")	10
Width (")	2
Capacity (litres)	9,500
Chlorine Removal Capacity (litres)	5,500
Flow Rate (lpm)	3.8
Maximum Operating Pressure Differential (bar)	6.9
Maximum Operating Temperature (°C)	38
Inlet/Outlet Ports (")	1/4

MATERIALS OF CONSTRUCTION



Cartridge Case:	Polypropylene
Carbon Type:	Granular Activated Coconut Carbon
Filter Pad:	Polypropylene

DIMENSIONS

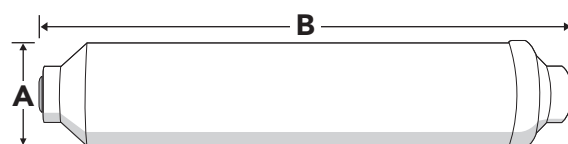

Dimensions (mm)		
Code	A	B
SCIG	50.8	254

ORDERING GUIDE

Code	Micron (µm)	Length (")
SCIG	20	10

i.e. SCIG-20-10

PRODUCT RANGE

The below products have often been associated with this product.



SCIG

Granular carbon



SCIGP

Granular carbon with
phosphate for scale
control



SCIB

Carbon block



SCIBP

Carbon block with
phosphate for scale
control