

THE GO-TO FOR COMMERCIAL PURE WATER PRODUCTION

Lightweight and durable to withstand the rigours of RO water production in the window washing market these membrane housings are suitable for 4040 and 4021 membranes. Designed with operator in mind they have a simplified end cap removal system and come complete with O-rings, clamp fittings and mounting straps.



PED
Compliant
Article 4, Paragraph 3, Group 2 Liquids

MATERIALS OF CONSTRUCTION

Housing:	304 Stainless Steel
Clamps:	304 Stainless Steel
O-Ring:	Silicone
End caps:	ABS
Clamp Screws:	304 Stainless Steel
Mounting Strap:	304 Stainless Steel


TECHNICAL DATA

Operating Temperature (°C)	1-40
Maximum Operating Pressure (bar)	17

FEATURES & BENEFITS

- Increased resistance to UV (compared to PVC & FRP)
- Secure integrated clamping system
- Complete with mounting straps

DIMENSIONS

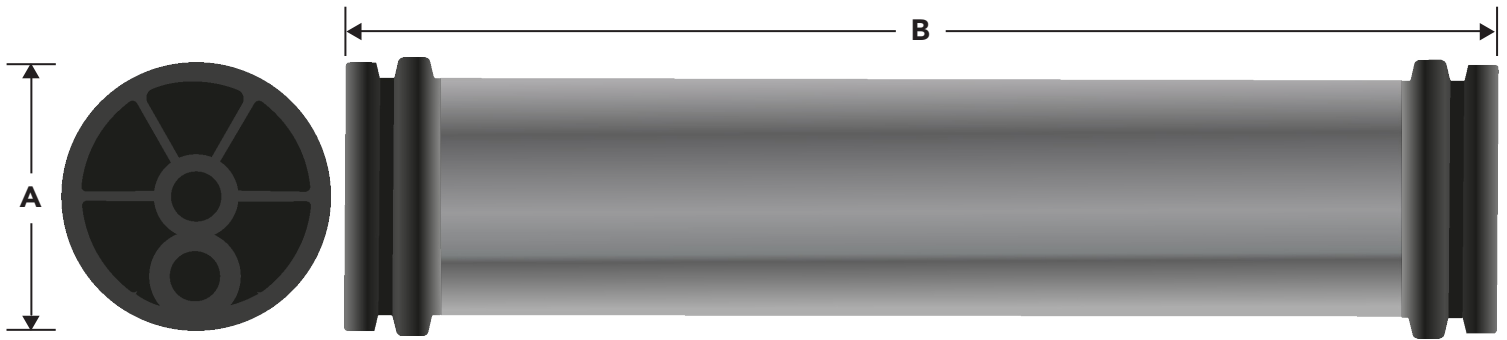

Product	Dimensions (")	
	A	B
WWH-4021	4.6	23.7
WWH-4040	4.6	42.7

ORDERING GUIDE



Code	Size (")	Port Size (Feed & Concentrate)	Port Size (Permeate)
WWH	4021	3/4	1/2
	4040		

e.g. WWH-4021

PRODUCT RANGE



The below products have often been associated with this product.



EMH-PP

Simple, effective and high production membrane system



SMH

Supporting existing and new systems



WWH

The go-to for commercial pure water production